
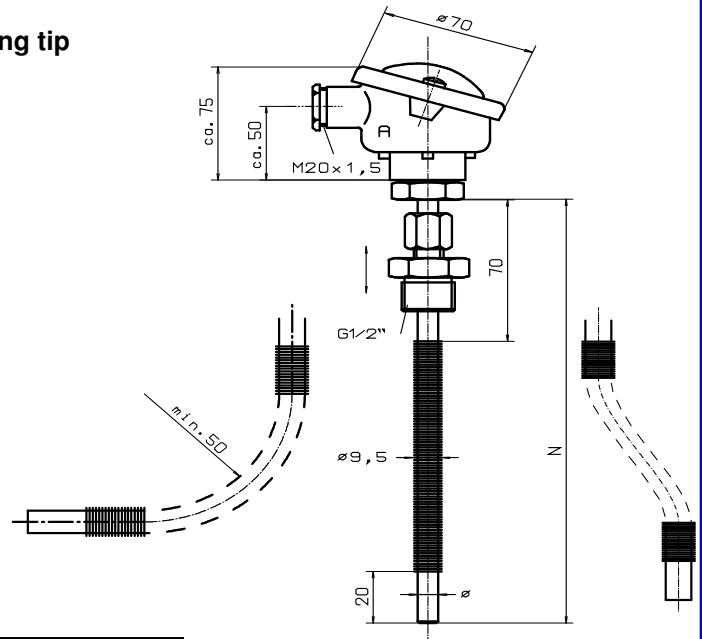


Resistance thermometer with any slewing measuring tip

Measuring insert	1 x PT100 / 2 x PT100
Measuring range	0° C bis 400° C
Armature	VA-Material 1.4541 Fold compensation segment Measuring tip optional 6/8 mm Ø Minimum bending radius 50 mm
Fitting	Moveable with crimp Material 1.4541
Connection	with terminal head Form B or with fixed cable connection


Version With connection head

N	Tip 6 mm Ø		Tip 8 mm Ø	
	1 x PT 100	2 x PT 100	1 x PT 100	2 x PT 100
150	4.90.04.11	4.90.04.12	4.90.05.11	4.90.05.12
200	4.90.04.21	4.90.04.22	4.90.05.21	4.90.05.22
250	4.90.04.31	4.90.04.32	4.90.05.31	4.90.05.32
300	4.90.04.41	4.90.04.42	4.90.05.41	4.90.05.42
350	4.90.04.51	4.90.04.52	4.90.05.51	4.90.05.52
400	4.90.04.61	4.90.04.62	4.90.05.61	4.90.05.62
Additional cable length per 1m			4.90.04.01	4.90.04.02
Additional price 3-wire connection			4.90.00.03	4.90.00.23
Additional price 4-wire connection			4.90.00.04	4.90.00.24

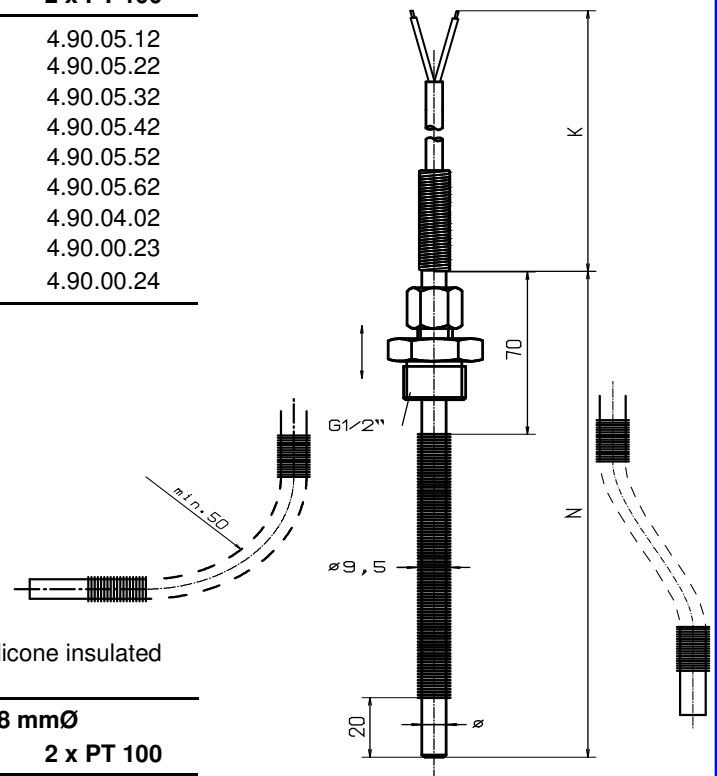

Version	Fixed connected cable Teflon insulation wires, outside Silicone insulated Cable length 2 m
----------------	---

N	Tip 6 mm Ø		Tip 8 mm Ø	
	1 x PT 100	2 x PT 100	1 x PT 100	2 x PT 100
150	4.90.06.11	4.90.06.12	4.90.07.11	4.90.07.12
200	4.90.06.21	4.90.06.22	4.90.07.21	4.90.07.22
250	4.90.06.31	4.90.06.32	4.90.07.31	4.90.07.32
300	4.90.06.41	4.90.06.42	4.90.07.41	4.90.07.42
350	4.90.06.51	4.90.06.52	4.90.07.51	4.90.07.52
400	4.90.06.61	4.90.06.62	4.90.07.61	4.90.07.62
Additional nominal length per 100 mm			4.90.06.01	4.90.06.02
Additional cable length per 1m			4.90.06.11	4.90.06.22
Additional price 3-wire connection			4.90.00.03	4.90.00.23
Additional price 4-wire connection			4.90.00.04	4.90.00.24