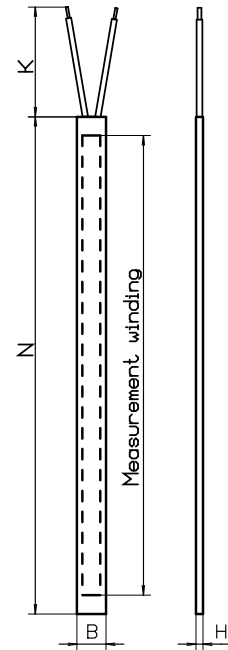


Slots resistance thermometer

Measuring resistor	1 x PT 100 / 2 x PT100 1 x Ni 100 / 2 x Ni 100
Operating temperature	Class H to 180° C
Connection wires	Normal version 2 m long Insulation class H Teflon wire terminal ends stripped Execution in the 3- or 4-wire connection possible

Version

Class H 0-180°C	Dimensions in mm Length x Width x Height	Order no. 1 x PT100	Order no. 2 x PT100	Delivery Time
	40 x 8 x 2	4.24.07.71		All models are available by arrangement
	60 x 8 x 2	4.24.07.81	—	
	100 x 10 x 2	4.24.07.11	—	
	150 x 10 x 2	4.24.07.21	—	
	250 x 10 x 2	4.24.07.31	—	
	100 x 12 x 2	4.24.07.41	4.24.07.42	
	150 x 12 x 2	4.24.07.51	4.24.07.52	
	250 x 12 x 2	4.24.07.61	4.24.07.62	
	1 m Connection cable	4.24.07.01	4.24.07.02	
	3-wire circuit	4.22.00.03	-	
	4-wire circuit	4.22.00.04	—	


Teflon resistance thermometer

Measuring insert	1 x PT 100 / 2 x PT 100
Operating temperature	0 to 250° C
Isolation	homogeneous, densely sintered Teflon sheath including measuring tip
Connection	Cable connector with ferrules Cable length 2 m Thermometer completely flexible
Measuring tip	approximately 50 mm then rigidly flexible cable
Place of installation	Galvanic baths, tank measurements, silo measurements and so on.

Version

N 2 m	Order no. 1 x PT100	Order no. 2 x PT100
	4.30.10.21	4.30.10.22
Surcharge		
1 m cable	4.30.00.21	4.30.00.22
3-wire	4.30.01.21	4.30.01.22
4-wire	4.30.02.21	4.30.02.22

